

feron.PRO
LED SOLUTIONS

HALO SERIES



IP66

IK10



Ctra. Bilbao-Plentzia, 31 inbisa, modulo 003 48950 Asua, Erandio (Bizkai)

Tel. 946 460 160 / info@ferongroup.eu / www.ferongroup.eu / FERON EUROPE GROUP

FEATURES

Feron.PRO

- Class I / Class II (optional)
- Light Philips Lumileds
- CCT: 3000K, 4000K, 5000K, 5700K
- Frequency: 50/60Hz
- SPD: 10KV, 20KV
- Power Factor: 0.95
- Input Voltage: AC 100-240V, AC 100-277V
- CRI: Ra>70 (Default) / Ra>80
- Driver: Inventronics, Other brands on request
- Lifetime: 100,000h.
- 5 years warranty
- Body Material: High pressure die-cast aluminum
- Cover Material: Tempered glass
- Housing Color: Gray-RAL9007 (Default)
- Other Colors on request
- Lens Material: UV-resistant, Polycarbonate
- Operating Temperature: -40°C ~ 45°C
- Operating Humidity: 10%~90% RH
- Storage Temperature: -40°C ~ 55°C

Data Sheet



3030 LIGHT SOURCE

Model N°	Pover	Lm/W	Lumen	Dimenciones	Weight	IK	IP
Z-Pro-0540X30W	30W	170Lm/W	5100Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X50W	50W	170Lm/W	8500Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X80W	80W	165Lm/W	13200Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X100W	100W	155Lm/W	16000Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X120W	120W	145Lm/W	17400Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X150W	150W	145Lm/W	21750Lm	695x480x88mm	6.8Kg	IK10	IP66

FEATURES

Feron.PRO

5050 LIGHT SOURCE


Model N°	Pover	Lm/W	Lumen	Dimenciones	Weight	IK	IP
Z-Pro-0540X30W	30W	155Lm/W	4650Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X50W	50W	160Lm/W	8000Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X80W	80W	155Lm/W	12400Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X100W	100W	155Lm/W	15500Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X120W	120W	150Lm/W	18000Lm	695x480x88mm	6.8Kg	IK10	IP66
Z-Pro-0540X150W	150W	150Lm/W	22500Lm	695x480x88mm	6.8Kg	IK10	IP66




HALO SIDE ENTRY

HALO series is a new elegant and versatile model, it can be adapted to different positions and needs such as street lighting, environmental, parks or even commercial buildings.


3030 VERSION




T2S53001




T3S53002




T3S53003




T2M53007



T3M53009




120D53014




T2S53018


5050 VERSION




T2S55004




T3M55005



T3S55006




T2M55008



T3M55010


DIMENSION

Feron.PRO

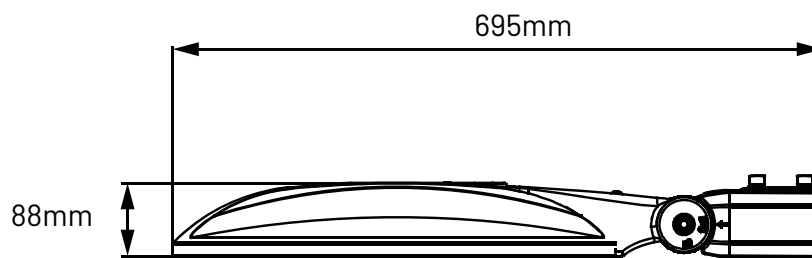


DETAILS


Feron.PRO




Photocell



Short Cap




NEMA Socket
(3 /5 /7pin)




Motion Sensor



Smart Controller




ZHAGA Socket




"80-60mm"




"60-40mm"




Square to round




"T" Type



"L" Type




"2" in "1"



"4" in "1"

Light Distributions

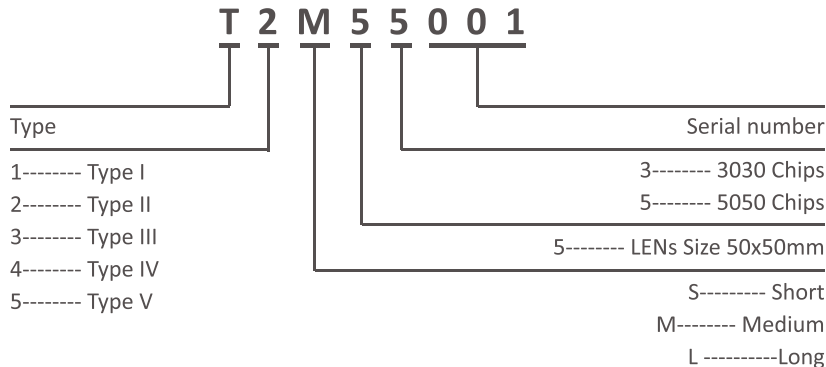


INSTALLATION

Feron.PRO



APPLICATION

Feron.PRO

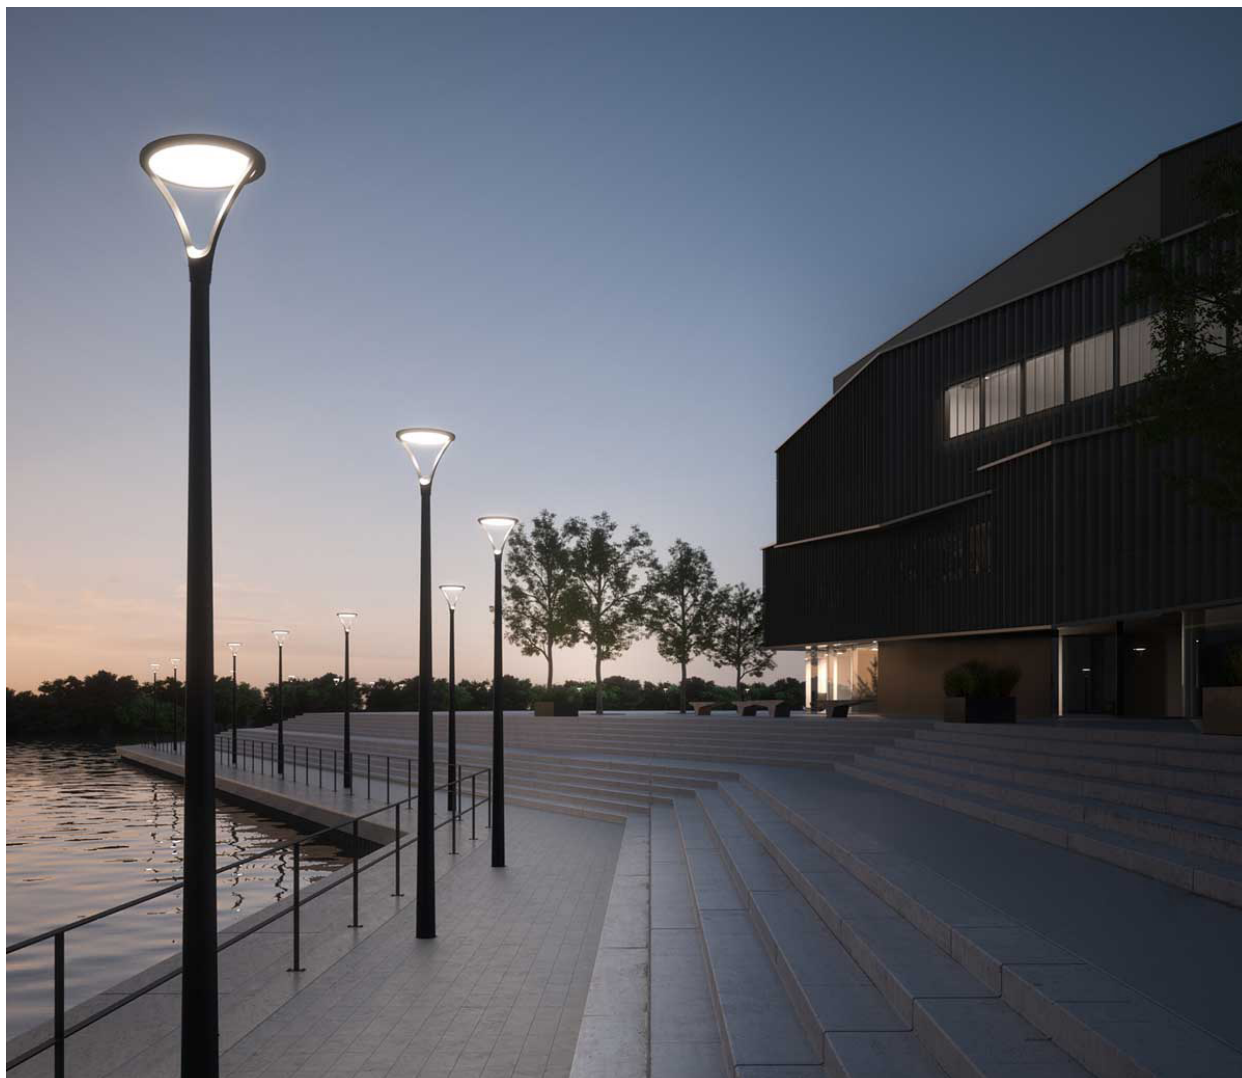

feron.PRO

Ctra. Bilbao-Plentzia, 31 inbisa, modulo 003 48950 Asua, Erandio (Bizkai)

Tel. 946 460 160 / info@ferongroup.eu / www.ferongroup.eu / FERON EUROPE GROUP