

feron.PRO

LED SOLUTIONS

L-SERIES



IP66

IK08



Ctra. Bilbao-Plentzia, 31 inbisa, modulo 003 48950 Asua, Erandio (Bizkai)

Tel. 946 460 160 / info@ferongroup.eu / www.ferongroup.eu / FERON EUROPE GROUP

FEATURES

Feron.PRO

- Class I / Class II (optional)
- Light Philips Lumileds
- CCT: 3000K, 4000K, 5000K, 5700K
- Driver: Inventronics, Other brands on request
- Standards: CE, RoHS, ENEC, CB, LM79, Lm80, Tm21, IP66, IK08
- Frequency: 50/60Hz
- SPD: 10KV, 20KV
- Power Factor: 0.95
- Life Time : 100,000h
- 5 years warranty
- Input Voltage: AC 100-240V, AC 100-277V
- CRI: Ra>70 (Default) / Ra>80
- THD: <15
- Body Material: High pressure die-cast aluminum
- Cover Material: Tempered glass
- Housing Color: Gray-RAL9007 (Default)
- Other Colors on request
- Lens Material: UV-resistant, Polycarbonate
- Operating Temperature: -40°C ~ 45°C
- Operating Humidity: 10%~90% RH
- Storage Temperature: -40°C ~ 55°C

Data Sheet



3030 LIGHT SOURCE

Model N°	Pover	Lm/W	Lumen	Dimenciones	N.W	G.W	IP	IK
Z-Pro-0410X37W	37W	130Lm/W	4810Lm	495x495x170mm	8.8Kg	7.5Kg	IP66	IK08

3535 LIGHT SOURCE

Model N°	Pover	Lm/W	Lumen	Dimenciones	N.W	G.W	IP	IK
Z-Pro-0410X37W	37W	150Lm/W	5550Lm	495x495x170mm	8.8Kg	7.5Kg	IP66	IK08



L - PENDANT MOUNTED



L - SIDE ENTRY MOUNTED

L-SERIES

L-SERIES Lamp breather ensures air balance inside and outside of the lamp, which improves lamp's service life. It is a new elegant and versatile model, it can be adapted to different positions and needs such as road lighting, environmental, parks or even commercial buildings due to its variants.



PRODUCT

Feron.PRO




DIMENSION


Feron.PRO




Post Top Mounted

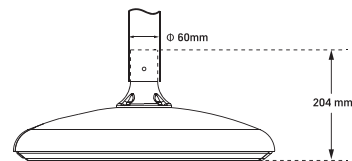




Pendant Mounted

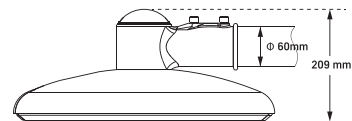

Side Entry Mounted

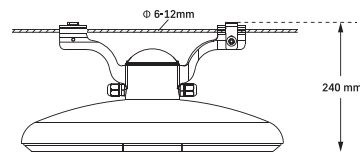

Suspended Mounted



DETAILS

Feron.PRO

LED power supply



• NON-DIMMABLE

High-end MeanWell LED driver, optimal stability, performance and lifespan.

POWERED BY
INVENTRONICS

• DIMMABLE

High-end programmable Inventronics LED driver, integrate dimming function and 6KV/10KV surge protection. Provide excellent performance and lifespan.

High-efficacy LED light source



Philips Lumileds 3030 ZD
Greater than 165lm/W high efficacy,
illumination grade LED light source.




Philips Lumileds 5050
Greater than 185lm/W high efficacy,
illumination grade LED light source.



Imported breather

Lamp breather ensures air balance inside and outside of the lamp, which improves lamp's service life.

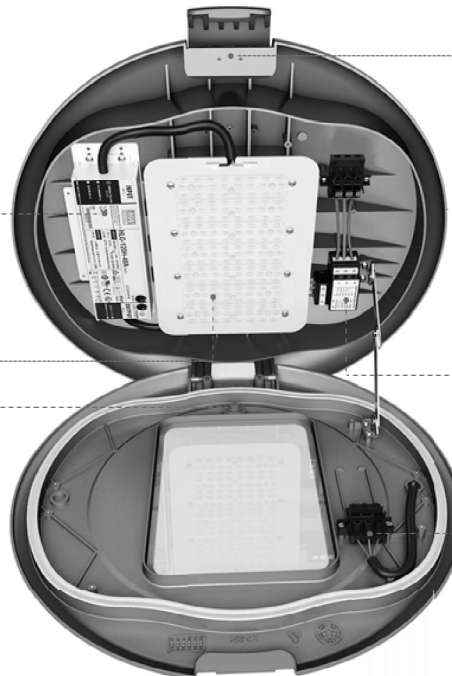

Easy Maintenance

Tool-less quick-release latches for speedy access.



Photocell available

Lamp will Auto turn on and off according to lux difference.



Surge protection device(10KV)

To provide more reliable guarantee for LED driver, extend the life of the product.



Power turn off protector

Under maintenance, when the fixtures be opened, the power will be cut off to protect personal safety.

APPLICATION

Feron.PRO



feron.PRO

Ctra. Bilbao-Plentzia, 31 inbisa, modulo 003 48950 Asua, Erandio (Bizkai)

Tel. 946 460 160 / info@ferongroup.eu / www.ferongroup.eu / FERON EUROPE GROUP